

# CMMR064 | DATASHEET

## 45° first surface mirror for 100.0 mm clamping diameter optics



### KEY ADVANTAGES

Reflect light at 90°.

Ideal for **limited space**.

**Easy and secure clamping system**.

**Compatible** with telecentric lenses and illuminators.

Optional **protective windows** available.



**CMMR series** is the Opto Engineering® answer to tight space integration issues, opening new installation options for your application.

### SPECIFICATIONS

#### Optical specifications


Coating	Aluminium reflective coating, R>90%, bandwidth 430-670 nm	
Deviation angle	(°)	90
Protective windows	Yes, not included	

#### Mechanical specifications

Clamping size	(mm)	100.0
Clamping system	locking	
Working distance difference <sup>1</sup>	(mm)	118.2
Length	(mm)	143.2
Width	(mm)	128.0
Height	(mm)	120.2
Mass	(g)	1336

<sup>1</sup> Value to be subtracted from the objective or illuminator working distance when the CMBS is used

### CMMR SETUP

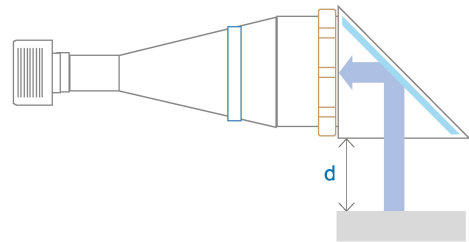

### COMPATIBLE PRODUCTS

Full list of compatible products available [here](#).



A wide selection of innovative machine vision components.

All product specifications and data are subject to change without notice to improve reliability, functionality, design or other. Photos and pictures are for illustration purposes only. Data are reported by design, actual lens performance may vary due to manufacturing tolerances.